

IQS-8130NGE Power Blazer

NEXT-GENERATION MULTISERVICE TEST MODULES



EtherSAM



Please note that this model has been discontinued. For more information, visit EXFO.com

Fully integrated multiservice solution supporting next-generation SONET/SDH, optical transport network (OTN), Ethernet and Fibre Channel applications

KEY FEATURES

DSO/EQ to OC-192/STM-64/OTU2; 10 Mbit/s to 10 Gbit/s Ethernet LAN/WAN/OTU2e as well as 1x, 2x, 4x and 10x Fibre Channel testing in a single module

Fully integrated solution for assessing the performance of Ethernet transport networks, including RFC 2544 and BER test functionalities

Comprehensive Fibre Channel test capabilities, including framed and unframed BERT, buffer-to-buffer credit estimation and round-trip latency measurements

OTN forward error correction (FEC) and optical channel data unit (ODU) multiplex testing capabilities as per ITU-T G.709

Offers ODU0 (1.25 Gbit/s) container with Gigabit Ethernet and SONET/SDH client signals for qualifying newly and efficiently mapped transport and datacom services over OTN

Supports circuit and packet ODUflex testing capabilities for OTN bandwidth optimization

Multichannel SDT measurements and real-time error/ alarm monitoring for SONET/SDH and OTN

Ethernet-over-SONET/SDH (EoS) testing via optional support for GFP, VCAT and LCAS software options

Complete bidirectional EtherSAM (ITU-T Y.1564) test suite

Complete Carrier Ethernet services portfolio: PBB-TE, MPLS, IPv4/IPv6 and one-way delay

True wire-speed, stateful TCP throughput test for undisputable SLA reinforcement for Ethernet services

COMPLEMENTARY PRODUCT



IQS-600 Integrated Qualification System

EXFO

THE CHOICE FOR INTEGRATED MULTISERVICE TRANSPORT TESTING

With the advent of packet-aware SONET/SDH and OTN add-drop multiplexers—including multiservice transport platforms (MSTPs) and new reconfigurable add-drop multiplexers (ROADMs)—system verification test (SVT) and R&D teams must perform not only traditional SONET/SDH and OTN tests, but also packet-based services verification such as Ethernet, 10 Gigabit Ethernet and Fibre Channel running over the same network elements. This has resulted in a growing demand for multitechnology test solutions that support the stringent testing and troubleshooting routines necessary to validate these advanced network elements.

EXFO's IQS-8130NGE (10/11.3 Gbit/s) Power Blazer test module has been designed to specifically address such testing, troubleshooting and maintenance requirements, providing SONET/SDH, OTN, Ethernet and Fibre Channel test functions in the industry's smallest and most efficient form factor and setting a new standard for multiservice testing.

SCALABLE, HIGH-PERFORMANCE SONET/SDH TESTING

SONET/SDH Testing and Troubleshooting

The IQS-8130NGE Power Blazer module offers a wide range of SONET/SDH test functions ranging from simple bit-error-rate (BER) testing to advanced characterization and troubleshooting procedures. These functions include:

- › Mixed and bulk payload generation and analysis from 64 kbit/s to 10 Gbit/s
- › High-order mappings: STS-1/3c/12c/48c/192c and AU-3/AU-4/AU-4-4c/16c/64c
- › Low-order mappings: VT1.5/2/6, TU-11/12/2/3
- › Unframed optical signal testing at 10 Gbit/s rate
- › Section/RS, Line/MS, high-order (HO) and low-order (LO) path overhead manipulation and monitoring
- › Section/RS, Line/MS, high-order (HO) and low-order (LO) path alarm/error generation and monitoring
- › High-order (HO) and low-order (LO) pointer generation and monitoring
- › K1/K2 OH byte capture
- › Tandem connection monitoring
- › Performance monitoring: G.821, G.826, G.828, G.829, M.2100, M.2101
- › Frequency analysis and power measurement
- › Frequency offset generation
- › Payload block and replace
- › DS1 loopcodes and NI/CSU loopback emulation
- › Automatic protection switching and service disruption time measurements
- › Multichannel SDT measurements and real-time error/alarm monitoring for all STS-1/AU-4 channels
- › Round-trip delay measurements
- › DS1/DS3 auto detection of line code, framing and test pattern
- › Dual DS1/DS3 receiver testing
- › Independent transmitter and receiver testing
- › Through mode analysis
- › Intrusive Through mode
- › Programmable error/alarm injection
- › DS1 FDL
- › Fractional T1/E1 testing
- › DS3 FEAC

Optical Transport Network (OTN) Testing

OTN as per ITU-T G.709 has recently introduced two new concepts: ODU0 and ODUflex. ODU0 is a new virtual container of 1.25 Gbit/s bandwidth specifically defined for efficiently mapping Gigabit Ethernet services over OTN. As for ODUflex, it is the most efficient sub-wavelength bandwidth management capability for transport line rates of 10 Gbit/s, 40 Gbit/s and upcoming 100 Gbit/s. ODUflex allows providers to interconnect routers in ways that enable efficient bandwidth growth in steps of 1.25 Gbit/s, eliminating the need to allocate a full fixed-rate ODU container to each connection and allowing service providers to transport efficiently and seamlessly across lower-cost optical infrastructures.

In addition to testing traditional SONET/SDH and Ethernet interfaces and services, the IQS-8130NGE Power Blazer module offers OTN test capabilities for verification of compliancy with ITU-T G.709 standards. The tests include:

- › OTU1 (2.7 Gbit/s) and OTU2 (10.7 Gbit/s) bit rates
- › ODU0 (1.25 Gbit/s) container with Gigabit Ethernet and SONET/SDH client signals mapping
- › ODUflex with Ethernet client signal mapping
- › Over-clocked OTU2 rates: OTU1e (11.0491 Gbit/s), OTU2e (11.0957 Gbit/s), OTU1f (11.2701 Gbit/s) and OTU2f (11.3176 Gbit/s)
- › Unframed optical signal testing at 10.7 Gbit/s, 11.0491 Gbit/s, 11.0957 Gbit/s, 11.2701 Gbit/s and 11.3176 Gbit/s rates
- › Synchronous mapping of SONET/SDH signals within OTN as well as synchronous and asynchronous demapping
- › Forward error correction (FEC) testing
- › Service disruption time (SDT) measurements
- › Multichannel SDT measurements and real-time error/alarm monitoring for all ODU0 channels
- › Round-trip delay (RTD) measurements
- › OTU, ODU, OPU overhead manipulation and monitoring
- › OTU, ODU (including ODU TCM), OPU layer alarms/errors generation and analysis
- › OTU, ODU (including ODU TCM) trace messages
- › Mux/demux of ODU1/ODU2 testing; generation of four ODU1 into a single ODU2 structure and transporting it over a single wavelength
- › ODU multiplexing alarm-generation and analysis
- › Through mode analysis
- › Intrusive Through mode
- › EoOTN testing using internally generated 10 GigE LAN and mapping onto OTU1e and OTU2e rate
- › 10 GigE LAN mapping into OTU2 using GFP-F

Next-Generation SONET/SDH Testing


Available next-generation SONET/SDH test functionalities include generic framing procedure (GFP), virtual concatenation (VCAT) and link capacity adjustment scheme (LCAS).

GFP	VCAT	LCAS
<ul style="list-style-type: none"> › Generation and analysis of frame types (client management/client data) › Alarm/error generation and monitoring › Overhead manipulation and monitoring › Transmission and reception statistics monitoring › Supported over contiguous or VCAT containers 	<ul style="list-style-type: none"> › High-order and low-order VCAT support › Simultaneous manipulation and monitoring of each member › Alarm/error generation and monitoring › Sequence-indicator manipulation and processing › Group-summary monitoring › Differential delay analysis and insertion 	<ul style="list-style-type: none"> › Emulation and analysis of LCAS protocol (Automatic and Manual modes) › Source and sink state machine control and monitoring › Real-time generation and monitoring of LCAS control fields › Real-time insertion and monitoring of LCAS alarms/errors

SmartMode: Real-Time Signal Structure Discovery and Monitoring

EXFO's IQS-8130NGE Power Blazer module supports a unique feature called SmartMode. This provides users with full visibility of all high-order (STS/AU) and low-order (VT/TU) mixed mappings within the incoming SONET/SDH test signal.

SmartMode automatically discovers the signal structure of the OC-n/STM-n line including mixed mappings and virtual concatenation (VCAT) members. In addition to this in-depth multichannel visibility, SmartMode performs real-time monitoring of all discovered high-order paths and user-selected low-order paths simultaneously, providing users with the industry's most powerful SONET/SDH multichannel monitoring and troubleshooting solution. Real-time monitoring allows users to rapidly troubleshoot software problems, saving valuable time and minimizing debugging time. SmartMode also provides one-touch test case start, allowing users to quickly configure a desired test path and SmartMode specific reporting.

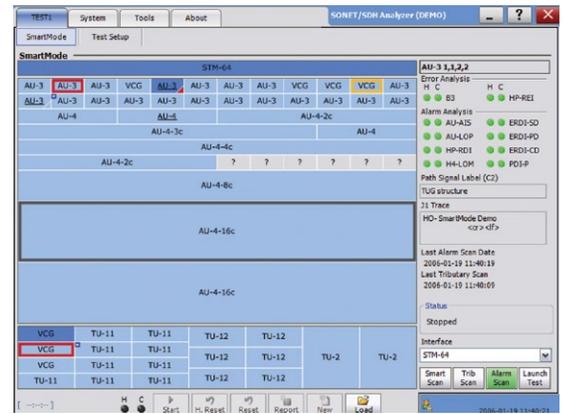

IQS-8130NGE SmartMode: multichannel signal discovery with real-time alarm scan.

ETHERNET PERFORMANCE VALIDATION AND RELIABILITY

EXFO's IQS-8130NGE Power Blazer offers a wide range of Ethernet test functions aimed at performance validation and reliability testing.

Interfaces

These modules support multiple Ethernet interfaces, both electrical and optical.

Applications


The IQS-8130NGE Power Blazer module delivers the features required to perform Ethernet service acceptance testing, namely RFC 2544 and BER testing.

ELECTRICAL	OPTICAL
10 Mbit/s	100 Mbit/s
100 Mbit/s	1000 Mbit/s (GigE)
1000 Mbit/s (GigE)	10 Gbit/s (10 GigE)—IQS-8130NGE only

ETHERSAM: THE NEW STANDARD IN ETHERNET TESTING


Service Configuration Test

The service configuration test consists of sequentially testing each service to validate that the service is properly provisioned and that all specific KPIs or SLA parameters are met. A ramp test and a burst test are performed to verify the committed information rate (CIR), excess information rate (EIR), committed burst size (CBS) and excess burst size (EBS).

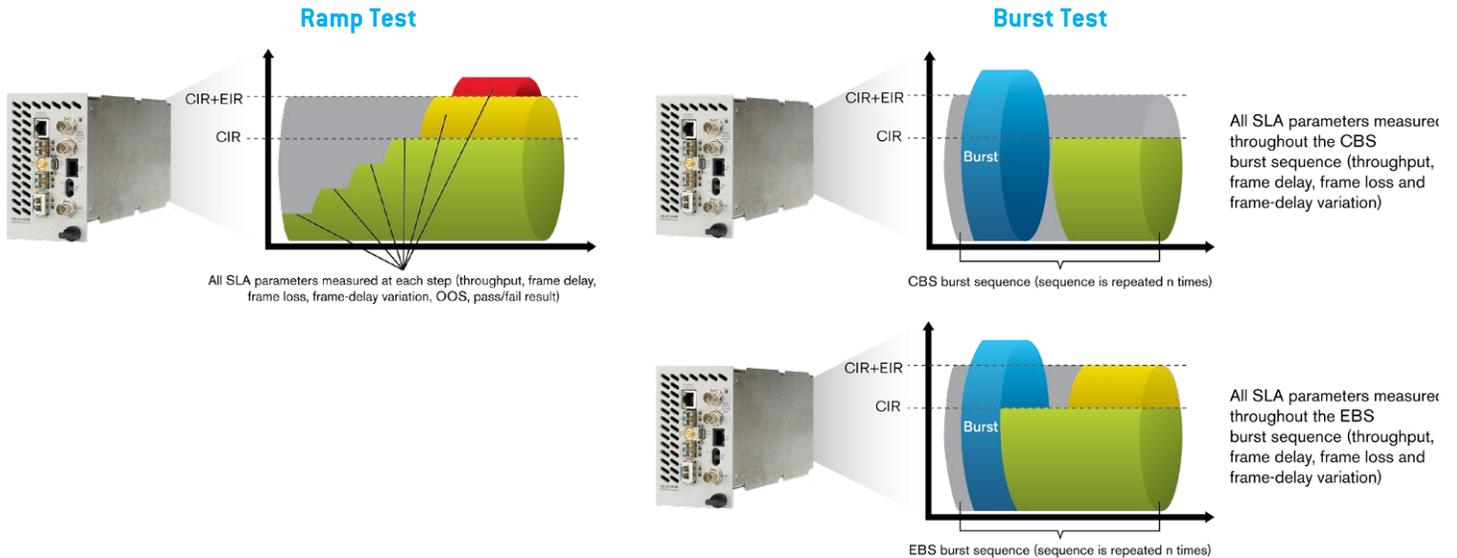



Service Performance Test

Once the configuration of each individual service is validated, the service performance test simultaneously validates the quality of all the services over time.

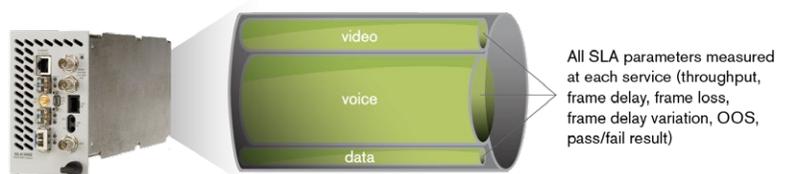

EtherSAM Bidirectional Results

EXFO's EtherSAM approach proves even more powerful as it executes the complete ITU-T Y.1564 test with bidirectional measurements. Key SLA parameters are measured independently in each test direction, thus providing 100 % first-time-right service activation—that is the highest level of confidence in service testing.

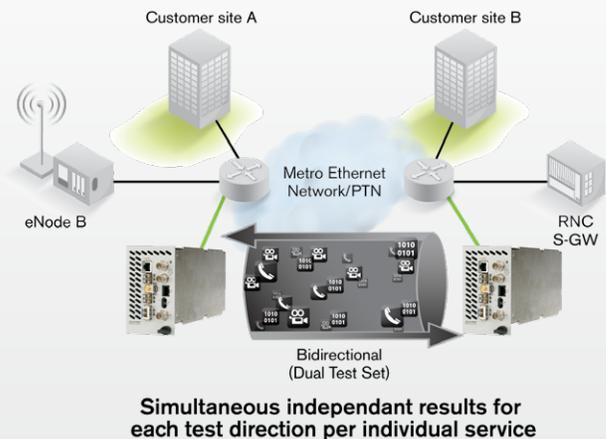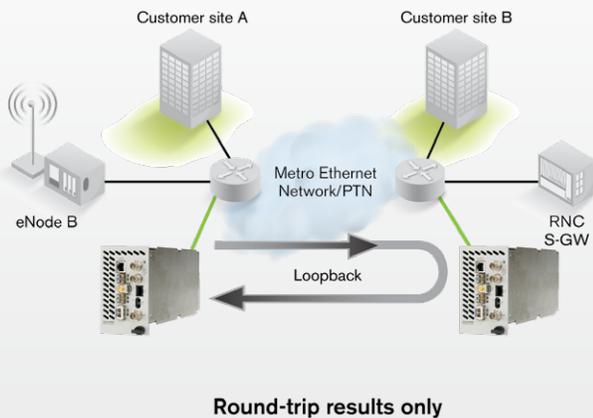

RFC 2544 TESTING

In cases where the Ethernet service is delivered via switched transport, the RFC 2544 measurements provide a baseline for service providers to define SLAs with their customers. They enable service providers to validate the quality of service (QoS) delivered and can provide them with a tool to create value-added services that can be measured and demonstrated to customers. For example, these tests provide performance statistics and commissioning verification for virtual LANs (VLANs), virtual private networks (VPNs) and transparent LAN services (TLS), all of which use Ethernet as an access technology.

The IQS-8130NGE Power Blazer modules come with a complete set of RFC 2544 test capabilities, including:

- › Throughput testing
- › Burst (back-to-back) testing
- › Frame loss analysis
- › Latency measurement

BER TESTING

Since the transparent transport of Ethernet services over physical media is becoming more widespread, Ethernet is increasingly carried across a variety of layer 1 media over longer distances. This creates a growing need for the certification of Ethernet transport on a bit-per-bit basis, which can be done using bit-error-rate testing (BERT).

BERT uses a pseudo-random binary sequence (PRBS) encapsulated into an Ethernet frame, making it possible to go from a frame-based error measurement to a bit-error-rate measurement. This provides the bit-per-bit error count accuracy required for the acceptance testing of physical-medium transport systems.

In addition to BER testing, the IQS-8130NGE Power Blazer modules also provide service disruption time (SDT) measurements.

ETHERNET QUALITY OF SERVICE MEASUREMENTS

Data services are making a significant shift toward supporting a variety of applications on the same network. Multiservice offerings such as triple-play services have fuelled the need for QoS testing to ensure the condition and reliability of each service and fully qualify SLA parameters. The IQS-8130NGE allows service providers to simultaneously simulate and qualify different applications through their multiple stream application. The user has the capability to configure up to 10 streams with different Ethernet and IP QoS parameters such as VLAN ID (802.1Q), VLAN Priority (802.1p), VLAN stacking (802.1ad Q-in-Q), ToS and DSCP. Specific stream profiles to transmit Voice-over-IP (VoIP), video and data can be selected for each stream. For each stream, measurements for throughput, latency, frame loss and packet jitter (RFC 3393) are available simultaneously, allowing for fast and in-depth qualification of all SLA criteria.

PBB-TE AND MPLS: CARRIER ETHERNET TRANSPORT SOLUTION TESTING

As technologically-sophisticated commercial and residential consumers continue to drive demand for premium, high-bandwidth data services such as voice and video, service providers worldwide are evolving their transport infrastructures to support these bandwidth and quality intensive services. No longer is an all-IP core sufficient; providers must now expand their IP convergence to the edge/metro network, in a cost-effective, quality-assured manner. Ethernet has long been accepted as an inexpensive, scalable data networking solution in LAN environments. The stringent quality of service expectations require solutions that tap into the cost-effectiveness of Ethernet without sacrificing the benefits of connection-oriented (albeit it costly) time-division multiplexing (TDM) solutions such as SONET/SDH.

Two Ethernet tunneling technologies address these requirements: Provider Backbone Bridge-Traffic Engineering or PBB-TE (also referred to as PBT) and transport MPLS. These two technologies enable connection-oriented Ethernet, providing carriers with a means of offering scalable, reliable and resilient Ethernet services. The PBB-TE and MPLS options on the IQS-8130NGE offer service providers a comprehensive field tool to efficiently qualify Ethernet services from end to end, validating metro and core tunneling technologies.

TCP THROUGHPUT

The Internet protocol (IP) and transmission control protocol (TCP) together form the essence of TCP/IP networking. While IP deals with the delivery of packets, TCP provides the integrity and assurance that the data packets transmitted by one host are reliably received at the destination. Applications such as hypertext transfer protocol (HTTP), e-mail or file transfer protocol (FTP) depend on TCP as their delivery assurance mechanism within networks. Customers deploying such applications expect not only physical and link level SLAs from their service providers, but assurance that their TCP traffic requirements will be supported across the network. The TCP throughput feature offers Ethernet service providers the capability of measuring and validating that the services offered to their customers support the TCP traffic performance they expect.

ETHERNET ADVANCED TROUBLESHOOTING

The IQS-8130NGE provides a number of advanced features essential for in-depth troubleshooting in the event of network failures or impairments. The advanced filtering option allows the user to configure up to ten filters each with up to four operands, which will be applied to the received Ethernet traffic. Detailed statistics are available for each configured filter providing the user with critical information required to pinpoint specific problems. Other advanced troubleshooting tools include advanced auto-negotiation and flow-control capabilities.



IQS-600 Integrated Qualification System

FIBRE CHANNEL NETWORK INTEGRITY TESTING

EXFO's IQS-8130NGE Power Blazer module also offers comprehensive testing capabilities for Fibre Channel network deployment.

Interfaces

These modules support multiple Fibre Channel interfaces:

INTERFACE	RATE (Gbit/s)
1x	1.0625
2x	2.125
4x	4.25
10x	10.51875

Applications

Since most SANs cover large distances and Fibre Channel has stringent performance attributes that must be respected, it is imperative to test at each phase of network deployment to ensure appropriate service levels. EXFO's IQS-8130NGE Fibre Channel option provides full wire-speed traffic generation at FC-0, FC-1 and FC-2 logical layers, allowing BER testing for link integrity measurements. Latency, buffer-to-buffer credit measurements for optimization, and login capabilities that enable end-to-end Fibre Channel network testing features are also supported.

Latency

Transmission of frames in a network is not instantaneous and is subject to multiple delays caused by the propagation delay in the fiber and by processing time inside each piece of network equipment. Latency is the total accumulation of delays between two end points. Some applications such as VoIP, video and storage area networks are very sensitive to excess latency.

It is therefore critical for service providers to properly characterize network latency when offering Fibre Channel services. From the latency measurement that they perform, the IQS-8130NGE module estimates buffer-to-buffer credit value requirements.

Buffer-to-Buffer Credit Estimation

The buffer credit mechanism is the flow-control engine for Fibre Channel. This is a crucial configuration parameter for optimal network performance. Usually, network administrators calculate the value by taking the distance traveled and the data rate into consideration; however, since latency issues are not considered, poor accuracy is to be expected. The IQS-8130NGE module is capable of estimating buffer credit values with respect to latency by calculating the distance according to the round-trip latency time.

Login Testing

Most new-generation transport devices (xWDM or SONET/SDH MUX) supporting Fibre Channel are no longer fully transparent; they also have increased built-in intelligence, acting more as Fibre-Channel switches. With switch fabric login ability, the IQS-8130NGE module supports connections to a remote location through a fabric or semi-transparent networks.

The login process not only permits the unit to connect through a fabric, but it also exchanges some of the basic port characteristics (such as buffer-to-buffer credit and class of service) in order to efficiently transport the traffic through the network.

The login feature allows automatic detection of port/fabric login, login status (successful login, in progress, failure and logout) and response to remote buffer-to-buffer advertised credit.

POWERFUL AUTOMATED TEST SCRIPTING

Automation and scripting, traditionally found in manufacturing applications, is gaining momentum in system verification testing environments to facilitate repeatability and improve quality and efficiency. EXFO's automation functionality addresses specific requirements of both environments. The IQS-8130NGE Power Blazer includes a wide range of SCPI commands (standard commands for programmable instrumentation), which are powerful enough to provide repeatable testing of complex configurations, yet simple enough to create a 10 gigabit SONET/SDH BERT in as little as six commands. As with all IQS-81xx modules, the IQS-8130NGE module includes an intuitive macro recorder enabling users to easily record test actions and automatically create test scripts in VB.Net.

Part of EXFO's Layer 0/1/2/3/4 Unified Testing Solution

EXFO's IQS-600 platform supports a mix of physical interfaces and protocol modules (SONET/SDH, Ethernet and Fibre Channel), making it the industry's first truly integrated and unified testing platform. This multilayer, multitechnology modular test platform simplifies upgrades and is the ideal solution for SVT, manufacturing and R&D testing environments.

Combined with EXFO's PMD, wavelength and optical spectrum analyzers, the IQS-8130NGE module is a unique integrated solution addressing all testing requirements from the physical to the transmission layer.

Flexible Remote Access Solution

Through their optional Visual Guardian Lite™ management software, the IQS-8130NGE Power Blazer supports remote testing, monitoring and data analysis via standard Ethernet with the same familiar user interface. In addition, users can remotely access the IQS-600 platform with a simple Web browser, a VNC client or a Remote Desktop to control any module housed in the platform.

Product Option Flexibility

With the IQS-8130NGE Power Blazer module, users can purchase one or more next-generation options (e.g., GFP, VCAT, LCAS) and/or OTN options (OTU1, OTU2) via field upgrades to customize their configuration as new needs arise. This avoids having to perform complete hardware and/or platform retrofits, therefore significantly decreasing capital and training expenses.

ELECTRICAL INTERFACES

The following section provides detailed information on all supported electrical interfaces.

ELECTRICAL INTERFACES		DS1	E1/2M		E2/8M	E3/34M	DS3/45M		STS-1e/ STM-0e/52M	E4/140M	STS-3e/ STM-1e/155M	
Tx pulse amplitude		2.4 to 3.6 V	3.0 V	2.37 V	2.37 V	1.0 ± 0.1 V	0.36 to 0.85 V			1.0 ± 0.1 Vpp	0.5 V	
Tx pulse mask		GR-499 Figure 9.5	G.703 Figure 15	G.703 Figure 15	G.703 Figure 16	G.703 Figure 17	DS-3 GR-499 Figure 9-8	45-M G.703 Figure 14	G.253 Figure 4-10/4-11	GR-703 Figure 18/19	STM-3e GR-253 Figure 4-12/ 4-13/4-14	STM-1e/ 155M G.703 Figure 22-23
Tx LBO preamplification		Power dBdsx +0.6 dBdsx (0-133 ft) +1.2 dBdsx (133-266 ft) +1.8 dBdsx (266-399 ft) +2.4 dBdsx (399-533 ft) +3.0 dBdsx (533-655 ft)					0 to 225 ft 255 to 450 ft		0 to 225 ft 255 to 450 ft		0 to 225 ft	
Cable simulation		Power dBdsx -22.5 dBdsx -15.0 dBdsx -7.5 dBdsx 0 dBdsx					450 to 900 (927) ft		450 to 900 (927) ft			
Rx level sensitivity (dynamic range)		For 772 kHz: TERM: ≤26 dB (cable loss only) at 0 dBdsx Tx DSX-MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only) Note: measurement units = dBdsx (Vref = 6 Vpp)	For 1024 kHz: TERM: ≤6 dB (cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only) Note: measurement units = dBm	For 1024 kHz: TERM: ≤6 dB (cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only) Note: measurement units = dBm	For 4224 kHz: TERM: ≤6 dB (cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Note: measurement units = dBm	For 17,184 MHz: TERM: ≤12 dB (coaxial cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Note: measurement units = dBm	For 22,368 MHz: TERM: ≤10 dB (cable loss only) DSX-MON: ≤26.5 dB (21.5 dB resistive loss + cable loss ≤ 5 dB) Note: measurement units = dBm (Vref = 1.21 Vpp)	For 25.92 MHz: TERM: ≤10 dB (cable loss only) MON: ≤25 dB (20 dB resistive loss + cable loss ≤ 5 dB) Note: measurement units = dBm	For 70 MHz: TERM: ≤12 dB (coaxial cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Note: measurement units = dBm	For 78 MHz: TERM: ≤12.7 dB (coaxial cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Note: measurement units = dBm		
Transmit bit rate		1.544 Mbit/s ± 4.6 ppm	2.048 Mbit/s ± 4.6 ppm	2.048 Mbit/s ± 4.6 ppm	8.448 Mbit/s ± 4.6 ppm	34.368 Mbit/s ± 4.6 ppm	44.736 Mbit/s ± 4.6 ppm	51.84 Mbit/s ± 4.6 ppm	139.264 Mbit/s ± 4.6 ppm	155.52 Mbit/s ± 4.6 ppm		
Receive bit rate		1.544 Mbit/s ± 140 ppm	2.048 Mbit/s ± 100 ppm	2.048 Mbit/s ± 100 ppm	8.448 Mbit/s ± 100 ppm	34.368 Mbit/s ± 100 ppm	44.736 Mbit/s ± 100 ppm	51.84 Mbit/s ± 100 ppm	139.264 Mbit/s ± 100 ppm	155.52 Mbit/s ± 100 ppm		
Measurement accuracy (uncertainty)	Frequency	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	±4.6 ppm	
	Electrical power	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	DSX range: ±1.0 dB DSX-MON range: ±2.0 dB	DSX range: ±1.0 dB DSX-MON range: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	Normal: ±1.0 dB Monitor: ±2.0 dB	
Peak-to-peak voltage		±10 % down to 500 mVpp	±10 % down to 500 mVpp	±10 % down to 500 mVpp	±10 % down to 400 mVpp	±10 % down to 200 mVpp	±10 % down to 200 mVpp	±10 % down to 200 mVpp	±10 % down to 200 mVpp	±10 % down to 200 mVpp	±10 % down to 200 mVpp	
Frequency offset generation		1.544 Mbit/s ± 140 ppm	2.048 Mbit/s ± 70 ppm	2.048 Mbit/s ± 70 ppm	8.448 Mbit/s ± 50 ppm	34.368 Mbit/s ± 50 ppm	44.736 Mbit/s ± 50 ppm	51.84 Mbit/s ± 50 ppm	139.264 Mbit/s ± 50 ppm	155.52 Mbit/s ± 50 ppm		
Intrinsic jitter (Tx)		ANSI T1.403 section 6.3 GR-499 section 7.3	G.823 section 5.1	G.823 section 5.1	G.823 section 5.1	G.823 section 5.1 G.751 section 2.3	GR-449 section 7.3 (categories I and II)	GR-253 section 5.6.2.2 (category II)	G.823 section 5.1	G.825 section 5.1 GR-253 section 5.6.2.2		
Input jitter tolerance		AT&T PUB 62411 GR-499 section 7.3	G.823 section 7.1	G.823 section 7.1	G.823 section 7.1	G.823 section 7.1	GR-449 section 7.3 (categories I and II)	GR-253 section 5.6.2.2 (category II)	G.823 section 7.1 G.751 section 3.3	G.825 section 5.2 GR-253 section 5.6.2.3		
Line coding		AMI and B8ZS	AMI and HDB3	AMI and HDB3	HDB3	HDB3	B3ZS	B3ZS	CMI	CMI		
Input impedance (resistive termination)		100 ohms ± 5 %, balanced	120 ohms ± 5 %, balanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 10 %, unbalanced	75 ohms ± 5 %, unbalanced		
Connector type		BANTAM and RJ-48C	BANTAM and RJ-48C	BNC	BNC	BNC	BNC	BNC	BNC	BNC		

SYNCHRONISATION INTERFACES

	External Clock DS1/1.5M	External Clock E1/2M	External Clock E1/2M	Trigger 2 MHz
Tx pulse amplitude	2.4 to 3.6 V	3.0 V	2.37 V	0.75 to 1.5 V
Tx pulse mask	GR-499 figure 9.5	G.703 figure 15	G.703 figure 15	G.703 figure 20
Tx LBO preamplification	Typical power dBdsx +0.6 dBdsx (0-133 ft) +1.2 dBdsx (133-266 ft) +1.8 dBdsx (266-399 ft) +2.4 dBdsx (399-533 ft) +3.0 dBdsx (533-655 ft)			
Rx level sensitivity (dynamic range)	TERM: ≤6 dB (cable loss only) (at 772 kHz for T1) DSX-MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only)	TERM: ≤6 dB (cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only)	TERM: ≤6 dB (cable loss only) MON: ≤26 dB (20 dB resistive loss + cable loss ≤ 6 dB) Bridge: ≤6 dB (cable loss only)	≤6 dB (cable loss only)
Transmission bit rate	1.544 Mbit/s ± 4.6 ppm	2.048 Mbit/s ± 4.6 ppm	2.048 Mbit/s ± 4.6 ppm	
Reception bit rate	1.544 Mbit/s ± 50 ppm	2.048 Mbit/s ± 50 ppm	2.048 Mbit/s ± 50 ppm	
Intrinsic jitter (Tx)	ANSI T1.403 section 6.3 GR-499 section 7.3	G.823 section 6.1	G.823 section 6.1	G.703 table 11
Input jitter tolerance	AT&T PUB 62411 GR-499 SECTION 7.3	G.823 section 7.2 G.813	G.823 section 7.2 G.813	
Line coding	AMI and B8ZS	AMI and HDB3	AMI and HDB3	
Input impedance (resistive termination)	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced	75 ohms ± 5 %, unbalanced
Connector type	BNC ^a	BNC ^a	BNC	BNC

Note

a. Adaptation cable required for BANTAM.

ELECTRICAL INTERFACES (CONT'D)

ETHERNET ADD/DROP INTERFACE		
10/100/1000 Base-T (Add/Drop)	Compliance	10 Mbit/s: IEEE 802.3 section 14 100 Mbit/s: IEEE 802.3 section 25 1000 Mbit/s: IEEE 802.3 section 40
	Connector	RJ-45 Ethernet
Gigabit Ethernet (Add/Drop)	Interface/connector	SFP/Dual LC
	Compliance	1000 Mbit/s: IEEE 802.3 Section 40 ^a
	Wavelength/Max Tx level	850, 1310 nm/-3 dBm 1550 nm/+5 dBm

REF-OUT INTERFACE							
Parameter	Value						
Tx pulse amplitude	600 ± 150 mVpp						
Transmission frequency	SONET/SDH/10 GigE WAN	10 GigE LAN	OTU2	OTU1e	OTU2e	OTU1f	OTU2f
Clock divider = 16	622.08 MHz	644.53 MHz	669.33 MHz	690.57 MHz	693.48 MHz	704.38 MHz	707.35 MHz
Clock divider = 32	311.04 MHz	322.266 MHz	334.66 MHz	345.29 MHz	346.74 MHz	352.19 MHz	353.68 MHz
Clock divider = 64	155.52 MHz	161.133 MHz	167.33 MHz	172.64 MHz	173.37 MHz	176.10 MHz	176.84 MHz
Output configuration	AC coupled						
Load impedance	50 ohms						
Maximum cable length	3 meters						
Connector Type	SMA						

SONET/SDH AND OTN OPTICAL INTERFACES

The following section provides detailed information on all supported SONET/SDH and OTN optical interfaces.

SONET/SDH AND OTN OPTICAL INTERFACES																
	OC-3/STM-1				OC-12/STM-4				E2/8M				OC-192/STM-64/OTU2			
	15 km; 1310 nm	40 km; 1310 nm	40 km; 1550 nm	80 km; 1550 nm	15 km; 1310 nm	40 km; 1310 nm	40 km; 1550 nm	80 km; 1550 nm	15 km; 1310 nm	40 km; 1310 nm	40 km; 1550 nm	80 km; 1550 nm	10 km; 1310 nm	40 km; 1550 nm	80 km; 1550 nm	
Tx level	-5 to 0 dBm	-2 to 3 dBm	-5 to 0 dBm	-2 to 3 dBm	-5 to 0 dBm	-2 to 3 dBm	-5 to 0 dBm	-2 to 3 dBm	-5 to 0 dBm	-2 to 3 dBm	-5 to 0 dBm	-2 to 3 dBm	-6 to -1 dBm	-1 to 2 dBm	0 to 4 dBm	
Rx operating range	-23 to -10 dBm	-30 to -15 dBm	-23 to -10 dBm	-30 to -15 dBm	-22 to 0 dBm	-27 to -9 dBm	-22 to 0 dBm	-29 to -9 dBm	-18 to 0 dBm	-27 to -9 dBm	-18 to 0 dBm	-28 to -9 dBm	-11 to -1 dBm	-14 to -1 dBm	-24 to -9 dBm	
Transmit bit rate	155.52 Mbit/s ± 4.6 ppm				622.08 Mbit/s ± 4.6 ppm				2.48832 Gbit/s ± 4.6 ppm 2.66606 Gbit/s ± 4.6 ppm (OTU1)				9.95328 Gbit/s ± 4.6 ppm (OC-192/STM-64) 10.70922 Gbit/s ± 4.6 ppm (OTU2) 11.0491 Gbit/s ± 4.6 ppm (OTU1e) 11.0957 Gbit/s ± 4.6 ppm (OTU2e) 11.2701 Gbit/s ± 4.6 ppm (OTU1f) 11.3176 Gbit/s ± 4.6 ppm (OTU2f)			
Receive bit rate	155.52 Mbit/s ± 100 ppm				622.08 Mbit/s ± 100 ppm				2.48832 Gbit/s ± 100 ppm 2.66606 Gbit/s ± 100 ppm (OTU1)				9.95328 Gbit/s ± 100 ppm (OC-192/STM-64) 10.70922 Gbit/s ± 100 ppm (OTU2) 11.0491 Gbit/s ± 120 ppm (OTU1e) 11.0957 Gbit/s ± 120 ppm (OTU2e) 11.2701 Gbit/s ± 120 ppm (OTU1f) 11.3176 Gbit/s ± 120 ppm (OTU2f)			
Operational wavelength range	1261 to 1360 nm	1263 to 1360 nm	1430 to 1580 nm	1480 to 1580 nm	1270 to 1360 nm	1280 to 1335 nm	1430 to 1580 nm	1480 to 1580 nm	1260 to 1360 nm	1280 to 1335 nm	1430 to 1580 nm	1500 to 1580 nm	1290 to 1330 nm		1530 to 1565 nm	1530 to 1565 nm
Spectral width	1 nm (-20 dB)				1 nm (-20 dB)				1 nm (-20 dB)				1 nm (-20 dB)			
Frequency offset generation	±50 ppm				±50 ppm				±50 ppm				±50 ppm ^b			
Measurement accuracy (uncertainty)	Frequency ±4.6 ppm				±4.6 ppm				±4.6 ppm				±4.6 ppm			
	Optical power ±2 dB				±2 dB				±2 dB				±2 dB			
Maximum Rx before damage ^c	3 dBm				3 dBm				3 dBm				3 dBm			
Jitter compliance	GR-253 (SONET) G.958 (SDH)				GR-253 (SONET) G.958 (SDH)				GR-253 (SONET) G.958 (SDH) G.8251 (OTN)				GR-253 (SONET) G.825 (SDH) G.8251 (OTN)			
Line coding	NRZ				NRZ				NRZ				NRZ			
Eye safety	SFP/XFP transceivers comply with IEC 60825 and 21 CFR 1040.10 (except for deviations pursuant to Laser Notice No. 50, dated July 2001), for Class 1 or 1M lasers.															
Connector ^d	Dual LC				Dual LC				Dual LC				Dual LC			
Transceiver type ^e	SFP				SFP				SFP				XFP			

Notes

- SFP/XFP transceivers comply with IEC 60825 and 21 CFR 1040.10 (except for deviations pursuant to Laser Notice 50, dated July, 2001), for Class 1 or 1M lasers.
- For OTU1e, OTU2e, OTU1f and OTU2f rates, the frequency offset generation is ±115 ppm.
- In order not to exceed the maximum receiver power level before damage, an attenuator must be used.
- External adaptors can be used for other types of connectors. For example FC/PC.
- SFP/XFP compliance: The IQS-8130NGE selected SFP/XFP shall meet the requirements stated in the "Small Form-Factor Pluggable (SFP) Transceiver Multisource Agreement (MSA)". The IQS-8130NGE selected SFP/XFP shall meet the requirements stated in the "Specification for Diagnostic Monitoring Interface for Optical Xcvrs".

SONET/SDH FUNCTIONAL SPECIFICATIONS

SONET AND DS _N		SDH AND PDH	
Optical interfaces	OC-3, OC-12, OC-48, OC-192	Optical interfaces	STM-1, STM-4, STM-16, STM-64
Available wavelengths (nm)	1310, 1550	Available wavelengths (nm)	1310, 1550
Electrical interfaces	DS1, DS3, STS-1e, STS-3e	Electrical interfaces ^a	1.5M (DS1), 2M (E1), 8M (E2), 34M (E3), 45M (DS3), 140M (E4), STM-0e, STM-1e
DS1 framing	Unframed, SF, ESF	2M framing	Unframed, PCM30, PCM31, PCM30 CRC-4, PCM31 CRC-4
DS3 framing	Unframed, M13, C-bit parity	8M, 34M, 140M framing	Unframed, framed
Clocking	Internal, loop-timed, external (BITS), intermodule	Clocking	Internal, loop-timed, external (MTS/SETS), 2 MHz, intermodule
Mappings^b		Mappings^b	
VT1.5	Bulk, DS1, GFP ^c	TU-11-AU-3, TU-11-AU-4	Bulk, 1.5M, GFP ^c
VT2	Bulk, E1, GFP ^c	TU-12-AU-3, TU-12-AU-4	Bulk, 1.5M, 2M, GFP ^c
VT6	Bulk, GFP ^c	TU-3-AU-4	Bulk, 34M, 45M, GFP ^c
STS-1 SPE	Bulk, DS3, GFP ^c	TU-2-AU-3, TU-2-AU-4	Bulk, GFP ^c
STS-3c	Bulk, E4, GFP ^c	AU-4	Bulk, 140M, GFP ^c
STS-12c/48c/192c, SPE	Bulk, GFP ^c	AU-4-4c/16c/64c	Bulk, GFP ^c
SONET overhead analysis and manipulation	A1, A2, J0, E1, F1, D1-D12, K1, K2, S1, M0, E2, J1, C2, G1, F2, H4, Z3, Z4, Z5, N1, N2, Z6, Z7	SDH overhead analysis and manipulation	A1, A2, J0, E1, F1, D1-D12, K1, K2, S1, M0, G1, F2, F3, K3, N1, N2, K4, E2, J1, C2, H4
Error insertion		Error insertion	
DS1	Framing bit, BPV, CRC-6, bit error	E1 (2M)	Bit error, FAS, CV, CRC-4, E-bit
DS3	BPV, C-bit, F-bit, P-bit, FEBE, bit error	E2 (8M), E3 (34M), E4 (140M)	Bit error, FAS, CV
STS-1e, STS-3e	Section BIP (B1), line BIP (B2), path BIP (B3), BIP-2, REI-L, REI-P, REI-V, BPV, FAS, bit error	STM-0e, STM-1e	RS-BIP (B1), MS-BIP (B2), HP-BIP (B3), MS-REI, HP-REI, LP-BIP-2, LP-REI, CV, FAS, bit error
OC-3, OC-12, OC-48, OC-192	Section BIP (B1), line BIP (B2), path BIP (B3), BIP-2, REI-L, REI-P, REI-V, FAS, bit error	STM-1, STM-4, STM-16, STM-64	RS-BIP (B1), MS-BIP (B2), HP-BIP (B3), MS-REI, HP-REI, LP-BIP-2, LP-REI, CV, FAS, bit error
Error measurement		Error measurement	
DS1	Framing bit, BPV, CRC-6, excess zeros, bit error	E1 (2M)	Bit error, FAS, CV, CRC-4, E-bit
DS3	BPV, C-bit, F-bit, P-bit, FEBE, bit error	E2 (8M), E3 (34M), E4 (140M)	Bit error, FAS, CV
STS-1e, STS-3e	Section BIP (B1), line BIP (B2), path BIP (B3), BIP-2, REI-L, REI-P, REI-V, BPV, FAS, bit error	STM-0e, STM-1e	RS-BIP (B1), MS-BIP (B2), HP-BIP (B3), MS-REI, HP-REI, LP-BIP-2, LP-REI, CV, FAS, bit error
OC-3, OC-12, OC-48, OC-192	Section BIP (B1), line BIP (B2), path BIP (B3), BIP-2, REI-L, REI-P, REI-V, FAS, bit error	STM-1, STM-4, STM-16, STM-64	RS-BIP (B1), MS-BIP (B2), HP-BIP (B3), MS-REI, HP-REI, LP-BIP-2, LP-REI, FAS, bit error
Alarm insertion		Alarm insertion	
DS1	LOS, RAI, AIS, OOF, pattern loss	E1 (2M)	LOS, LOS Mframe, LOS CRC Mframe, LOF, AIS, TS16 AIS, RAI, RAI Mframe, pattern loss
DS3	LOS, RDI, AIS, OOF, DS3 idle, pattern loss	E2 (8M), E3 (34M), E4 (140M)	LOS, LOF, RAI, AIS, pattern loss
STS-1e, STS-3e, OC-3, OC-12, OC-48, OC-192	LOS, LOF, SEF, AIS-L, RDI-L, AIS-P, LOP-P, LOM, PDI-P, RDI-P, ERDI-PCD, ERDI-PPD, ERDI-PSD, UNEQ-P, AIS-V, LOP-V, RDI-V, ERDI-VCD, ERDI-VPD, ERDI-VSD, RFI-V, UNEQ-V, pattern loss	STM-0e, STM-1e, STM-1, STM-4, STM-16, STM-64	LOS, LOF, OOF, MS-AIS, MS-RDI, AU-AIS, AU-LOP, H4-LOM, HP-PDI, ERDI-PSD, ERDI-PCD, ERDI-PPD, HP-UNEQ, TU-AIS, LP-RFI, LP-RDI, ERDI-VCD, ERDI-VPD, ERDI-VSD, LP-RFI, LP-UNEQ, pattern loss
Alarm detection		Alarm detection	
DS1	LOS, loss of clock (LOC), RAI, AIS, OOF, pattern loss	E1 (2M)	LOS, LOS Mframe, LOS CRC Mframe, LOC, LOF, AIS, TS16 AIS, RAI, RAI Mframe, pattern loss
DS3	LOS, LOC, RDI, AIS, OOF, DS3 idle, pattern loss	E2 (8M), E3 (34M), E4 (140M)	LOS, LOC, LOF, RAI, AIS, pattern loss
STS-1e, STS-3e, OC-3, OC-12, OC-48, OC-192	LOS, LOC, LOF, SEF, TIM-S, AIS-L, RDI-L, AIS-P, LOP-P, LOM, PDI-P, RDI-P, ERDI-PCD, ERDI-PPD, ERDI-PSD, PLM/SLM-P, UNEQ-P, TIM-P, AIS-V, LOP-V, RDI-V, ERDI-VCD, ERDI-VCD, ERDI-VPD, ERDI-VSD, RFI-V, UNEQ-V, TIM-V, PLM/SLM-V, pattern loss	STM-0e, STM-1e, STM-1, STM-4, STM-16, STM-64	LOS, LOF, LOC, OOF, RS-TIM, MS-AIS, MS-RDI, AU-AIS, AU-LOP, H4-LOM, HP-RDI, ERDI-PSD, ERDI-PCD, ERDI-PPD, HP-PLM/SLM, HP-UNEQ, HP-TIM, TU-AIS, LP-RFI, LP-RDI, ERDI-VPD, ERDI-VSD, LP-RFI, LP-UNEQ, LP-TIM, LP-PLM/SLM, pattern loss
<i>Frequency alarm on all supported interfaces.</i>			
Patterns		Patterns	
DS0	2E9-1, 2E11-1, 2E20-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 3-in-24, 32 bit programmable (inverted or non-inverted), bit errors	E0 (64K)	2E9-1, 2E11-1, 2E20-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 3-in-24, 32 bit programmable (inverted or non-inverted), bit errors
DS1	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, QRSS, 1-in-8, 1-in-16, 3-in-24, 32 bit programmable (inverted or non-inverted), T1-DALY, 55-Octet, bit errors	E1 (2M)	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 3-in-24, 32 bit programmable (inverted or non-inverted), bit error
DS3	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 3-in-24 ^d , 32 bit programmable (inverted or non-inverted), bit errors	E2 (8M), E3 (34M), E4 (140M)	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 3-in-24 d, 32 bit programmable (inverted or non-inverted), bit error
VT1.5/2/6	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, QRSS, 1-in-8, 1-in-16, 32 bit programmable (inverted or non-inverted), bit errors	TU-11/12/2/3	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 32 bit programmable (inverted or non-inverted), bit error
STS-1, STS-3c/12c/24c/48c/192c	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 32 bit programmable (inverted or non-inverted), bit errors	AU-3/AU-4/AU-4-4c/16c/64c	2E9-1, 2E11-1, 2E15-1, 2E20-1, 2E23-1, 2E31-1, 1100, 1010, 1111, 0000, 1-in-8, 1-in-16, 32 bit programmable (inverted or non-inverted), bit error

Pattern loss and bit-error generation and analysis supported on all patterns.

Notes

- 1.5M (DS1) and 45M (DS3) interfaces described under SONET and DS_N column.
- VCAT mappings are also available. Please refer to the VCAT section of this document for details.
- GFP supported only with purchase of GFP-F option.
- Not supported for E4 (140M).



SONET/SDH FUNCTIONAL SPECIFICATIONS (CONT'D)

NEXT-GENERATION SONET		NEXT-GENERATION SDH	
Generic Framing Procedure (GFP)		Generic Framing Procedure (GFP)	
Standards compliance	As per ITU-T G.7041, and ANSI T1.105.02	Standards compliance	As per ITU-T G.7041, G.707, and ANSI T1.105.02
Payload	PRBS pattern; Ethernet	Payload	PRBS pattern; Ethernet
Ethernet add/drop	Ability to add/drop Ethernet payload to/from GFP mapped OC-n/OTU signal	Ethernet add/drop	Ability to add/drop Ethernet payload to/from GFP mapped STM-n/OTU signal
Error insertion	Correctable core HEC, uncorrectable core HEC, correctable type HEC, uncorrectable type HEC, correctable extension HEC, uncorrectable extension HEC, payload FCS	Error insertion	Correctable core HEC, uncorrectable core HEC, correctable type HEC, uncorrectable type HEC, correctable extension HEC, uncorrectable extension HEC, payload FCS
Error monitoring	Correctable core HEC, uncorrectable core HEC, correctable type HEC, uncorrectable type HEC, correctable extension HEC, uncorrectable extension HEC, payload FCS	Error monitoring	Correctable core HEC, uncorrectable core HEC, correctable type HEC, uncorrectable type HEC, correctable extension HEC, uncorrectable extension HEC, payload FCS
Alarm insertion	Loss of client signal (LOCS) and loss of client character synchronization (LOCCS) with configurable time interval between 10 and 1200 ms, and loss of frame delineation (LFD), client forward defect indication (FDI), client reverse defect indication (RDI) and client defect clear indication (DCI)	Alarm insertion	Loss of client signal (LOCS) and loss of client character synchronization (LOCCS) with configurable time interval between 10 and 1200 ms, and loss of frame delineation (LFD), client forward defect indication (FDI), client reverse defect indication (RDI) and client defect clear indication (DCI)
Alarm monitoring	Loss of client signal (LOCS), loss of client character synchronization (LOCCS) and loss of frame delineation (LFD), client forward defect indication (FDI), client reverse defect indication (RDI) and client defect clear indication (DCI)	Alarm monitoring	Loss of client signal (LOCS), loss of client character synchronization (LOCCS) and loss of frame delineation (LFD), client forward defect indication (FDI), client reverse defect indication (RDI) and client defect clear indication (DCI)
Statistics	Transmit: client data frames (including payload bytes), client management frames, total frames, idle frames, GFP bandwidth usage (%), GFP mapping efficiency (%) Receive: client data frames (including payload bytes), client management frames, total frames, idle (control) frames, reserved (control) frames, invalid frames, discarded frames, EXI mismatches, UPI mismatches, CID mismatches, GFP bandwidth usage (%), GFP mapping efficiency (%)	Statistics	Transmit: client data frames (including payload bytes), client management frames, total frames, idle frames, GFP bandwidth usage (%), GFP mapping efficiency (%) Receive: client data frames (including payload bytes), client management frames, total frames, idle (control) frames, reserved (control) frames, invalid frames, discarded frames, EXI mismatches, UPI mismatches, CID mismatches, GFP bandwidth usage (%), GFP mapping efficiency (%)
Header manipulation	PTI, PFI, EXI, UPI, CID and spare (extension header) fields	Header manipulation	PTI, PFI, EXI, UPI, CID and spare (extension header) fields
Header monitoring	PLI, PTI, PFI, EXI, UPI, CID, spare (extension header) fields, cHEC, tHEC, eHEC	Header monitoring	PLI, PTI, PFI, EXI, UPI, CID, spare (extension header) fields, cHEC, tHEC, eHEC
Virtual Concatenation (VCAT)		Virtual Concatenation (VCAT)	
Standards compliance	Supports high-order and low-order virtual concatenation as per ANSI T1.105	Standards compliance	Supports high-order and low-order virtual concatenation as per ITU G.707
Mappings	High-order STS-1-Xv (X = 1 to 21) STS-3-Xv (X = 1 to 7) Low-order VT1.5-Xv (X = 1 to 64) VT-2-Xv (X = 1 to 64)	Mappings	High-order VC-3-Xv (X = 1 to 21) VC-4-Xv (X = 1 to 7) Low-order VC-11-Xv (X = 1 to 64) VC-12-Xv (X = 1 to 64) VC-3-Xv in AU-4 (X = 1 to 21)
Alarm insertion	LOM, OOM1, OOM2, SQM VCAT and path alarms can be generated independently on any member of a VCG	Alarm insertion	LOM, OOM1, OOM2, SQM VCAT and path alarms can be generated independently on any member of a VCG
Alarm monitoring	LOM, OOM1, OOM2, SQM, LOA	Alarm monitoring	LOM, OOM1, OOM2, SQM, LOA
Differential delay	Analysis Range: 0 to 256 ms Display: numerical and graphical Insertion Range: 0 to 256 ms	Differential delay	Analysis Range: 0 to 256 ms Display: numerical and graphical Insertion Range: 0 to 256 ms
Sequence number manipulation and processing	Sequence range: 0 to 63 Sequence number monitoring: current AcSQ (accepted SQ) monitored against the ExSQ (expected SQ); SQM alarm raised on mismatch	Sequence number manipulation and processing	Sequence range: 0 to 63 Sequence number monitoring: current AcSQ (accepted SQ) monitored against the ExSQ (expected SQ); SQM alarm raised on mismatch

SONET/SDH FUNCTIONAL SPECIFICATIONS (CONT'D)

NEXT-GENERATION SONET/SDH (CONT'D)

Link capacity adjustment scheme (LCAS)

Standards compliance	As per ITU G.7042; supported for both low-order and high-order VCAT groups
Test functions	<ul style="list-style-type: none"> › Emulation of source and sink state machines › Automatic and manual control of source and sink state machines › Independent overwrite capability at the source and sink for each member › Automatic SQ management
Source state machine control	<ul style="list-style-type: none"> › Add/remove member(s) › Configure: RS-ACK timeout, remote DUT, PLCT threshold › Statistics count: received RS-ACK, unexpected RS-ACK › Error/alarm generation: CRC errors, group ID (GID) mismatch › Error/alarm monitoring: loss of partial transport capacity, loss of total transport capacity, failure of protocol transmission, CRC errors, unexpected member status
Sink state machine control	<ul style="list-style-type: none"> › Add/remove member(s) › Configure Hold-Off and Wait-to-Restore timers, PLCR threshold › Toggle RS-ACK › Statistics count: transmitted RS-ACK › Error/alarm generation: CRC errors, group ID (GID) mismatch › Error/alarm monitoring: loss of partial transport capacity, loss of total transport capacity, failure of protocol reception, CRC errors, unexpected member status

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS

Power measurements	Supports power measurements, displayed in dBm (dBdsx for DS1), for optical and electrical interfaces.		
Frequency measurements	Supports clock frequency measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency), displayed in ppm and bit/s (bps), for optical and electrical interfaces.		
Frequency offset generation	Supports offsetting the clock of the transmitted signal on a selected interface to exercise clock recovery circuitry on network elements.		
Dual DSn receivers	Supports two DS1 or DS3 receivers, allowing users to simultaneously monitor two directions of a circuit under test in parallel, resulting in quick isolation of the source of errors.		
Performance monitoring	The following ITU-T recommendations, and corresponding performance monitoring parameters, are supported on the IQS-8130NGE. <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> ITU-T recommendation G.821 G.826 G.828 G.829 M.2100 M.2101 </td> <td style="vertical-align: top;"> Performance monitoring statistics ES, EFS, EC, SES, UAS, ESR, SESR, DM ES, EFS, EB, SES, BBE, UAS, ERS, SESR, BBER ES, EFS, EB, SES, BBE, SEP, UAS, ESR, SESR, BBER, SEPI ES, EFS, EB, SES, BBE, UAS, ESR, SESR, BBER ES, SES, UAS, ESR, SESR ES, SES, BBE, UAS, ESR, SESR, BBER </td> </tr> </table>	ITU-T recommendation G.821 G.826 G.828 G.829 M.2100 M.2101	Performance monitoring statistics ES, EFS, EC, SES, UAS, ESR, SESR, DM ES, EFS, EB, SES, BBE, UAS, ERS, SESR, BBER ES, EFS, EB, SES, BBE, SEP, UAS, ESR, SESR, BBER, SEPI ES, EFS, EB, SES, BBE, UAS, ESR, SESR, BBER ES, SES, UAS, ESR, SESR ES, SES, BBE, UAS, ESR, SESR, BBER
ITU-T recommendation G.821 G.826 G.828 G.829 M.2100 M.2101	Performance monitoring statistics ES, EFS, EC, SES, UAS, ESR, SESR, DM ES, EFS, EB, SES, BBE, UAS, ERS, SESR, BBER ES, EFS, EB, SES, BBE, SEP, UAS, ESR, SESR, BBER, SEPI ES, EFS, EB, SES, BBE, UAS, ESR, SESR, BBER ES, SES, UAS, ESR, SESR ES, SES, BBE, UAS, ESR, SESR, BBER		
Pointer adjustment and analysis	Generation and analysis of HO/AU and LO/TU pointer adjustments as per GR-253, and ITU-T G.707 <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> Generation › Pointer increment and decrement › Pointer jump with or without NDF › Pointer value </td> <td style="vertical-align: top;"> Analysis › Pointer increments › Pointer decrements › Pointer jumps (NDF, no NDF) › Pointer value and cumulative offset </td> </tr> </table>	Generation › Pointer increment and decrement › Pointer jump with or without NDF › Pointer value	Analysis › Pointer increments › Pointer decrements › Pointer jumps (NDF, no NDF) › Pointer value and cumulative offset
Generation › Pointer increment and decrement › Pointer jump with or without NDF › Pointer value	Analysis › Pointer increments › Pointer decrements › Pointer jumps (NDF, no NDF) › Pointer value and cumulative offset		
Programmable error/alarm injection	Ability to inject errors/alarms in the following modes: Manual, Constant Rate, Burst, Periodic Burst and Continuous.		
Service disruption time (SDT) measurements	The service disruption time test tool measures the time during which there is a disruption of service due to the network switching from the active channels to the backup channels. User-selectable triggers: all supported alarms and errors. Measurements: last disruption, shortest disruption, longest disruption, average disruption, total disruption, and service disruption count.		
Round-trip delay (RTD) measurements	The round-trip delay test tool measures the time required for a bit to travel from the IQS-8130NGE transmitter back to its receiver after crossing a far-end loopback. Measurements are supported on all supported IQS-8130NGE interfaces and mappings. Measurements: last RTD time, minimum, maximum, average, measurement count (no. of successful RTD tests), failed measurement count.		
Multichannel testing	Ability to monitor in real-time errors and alarms, and to perform simultaneous SDT measurements for all STS-1/AU-4 channels; a user-defined threshold can also be applied to the SDT measurements for simple pass/fail results for each channel.		
APS message control and monitoring	Ability to monitor and set up automatic protection switching messages (K1/K2 byte of SONET/SDH overhead).		
Synchronization status	Ability to monitor and set up synchronization status messages (S1 byte of SONET/SDH overhead).		
Signal label control and monitoring	Ability to monitor and set up payload signal labels (C2, V5 byte of SONET overhead).		
Through mode	Ability to perform Through mode analysis of any incoming electrical (DSn, PDH) and optical line (OC-3/STM-1, OC-12/STM-4, OC-48/STM-16, OC-192/STM-64, OTU1, OTU2, OTU1e and OTU2e) either transparently or intrusively.		
M13 mux/demux	Ability to multiplex/demultiplex a DS1 signal into/from a DS3 signal. (Note: E1 to DS3 mux/demux available with G.747 software option.)		
DS1 FDL	Support for DS1 Facility Data Link testing.		
DS1 loopcodes	Support for generation of DS1 in-band loopcodes with the availability of up to 10 pairs of user-defined loopcodes.		
NI/CSU loopback emulation	Ability to respond to DS1 in-band/out-of-band loopcodes.		
DS3 FEAC	Support for DS3 far-end alarms and loopback codewords.		
DS1/DS3 auto detection	Ability to automatically detect DS1/DS3 line coding, framing and test pattern.		
Tandem connection monitoring (TCM) ^a	Tandem connection monitoring (TCM), Option 2 ^b , is used to monitor the performance of a subsection of a SONET/SDH path routed via different network providers. The IQS-8130NGE supports transmitting and receiving alarms and errors on a TCM link; also, transmission and monitoring of the tandem connection (TC) trace can be generated to verify the connection between TCM equipment. Error generation: TC-IEC, TC-BIP, TC-REI, OEI Error analysis: TC-IEC, TC-REI, OEI, TC-VIOL Alarm generation: TC-RDI, TC-UNEQ, ODI, TC-LTC, TC-IAIS Alarm analysis: TC-TIM, TC-RDI, TC-UNEQ, ODI, TC-LTC, TC-IAIS		
Payload block and replace	Ability to terminate and analyze a specific high-order path element and replace it with a PRBS pattern on the TX side.		
K1/K2 OH byte capture	Ability to capture K1/K2 OH byte value transitions.		

Notes

- a. HOP and LOP supported.
b. G.707 option 2.

SONET/SDH FUNCTIONAL SPECIFICATIONS (CONT'D)

ADDITIONAL FEATURES	
Scripting	The built-in scripting engine and embedded macro-recorder provide a simple means of automating test cases and routines. Embedded scripting routines provide a powerful means of creating advanced test scripts.
Reports	Supports generation of test reports in .html, .csv, .txt, .pdf formats. Contents of reports are customizable by the user.
Power-up and restore	In the event of a power failure to the unit, the active test configuration and test logger are saved and restored upon bootup.
Store and load configurations	Ability to store and load test configurations to/from non-volatile memory.
Alarm hierarchy	Alarms are displayed according to a hierarchy based on root cause. Secondary effects are not displayed. This hierarchy serves to facilitate alarm analysis.
Configurable test views	This allows users to customize their test views; i.e., to dynamically insert or remove test tabs/windows, in addition to creating new test windows, so as to accurately match their testing needs.
Configurable test timer	Provides the ability for a user to set predefined test start and stop times.
Remote control	Available with Windows-based remote management software known as Visual Guardian Lite (optional software package). This allows users to remotely monitor and control the IQS-8130NGE module via standard Ethernet connection.

OTN FUNCTIONAL SPECIFICATIONS		
OTN	Standards compliance	ITU-T G.709, ITU G.798, ITU G.872
	Interfaces	OTU1 (2.7 Gbit/s), OTU2 (10.7 Gbit/s), OTU1e (11.0491 Gbit/s), OTU2e (11.0957 Gbit/s), OTU1f (11.2701 Gbit/s), OTU2f (11.3176 Gbit/s)
	Client types ^a	All supported SONET/SDH mappings (including next-generation GFP, VCAT, LCAS), NULL, PRBS (2E31-1), ODU1 into OTU2 multiplexing.
OTU Layer	Errors	OTU-FAS, OTU-MFAS, OTU-BEI, OTU-BIP-8
	Alarms	LOF, OOF, LOM, OOM, OTU-AIS, OTU-TIM, OTU-BDI, OTU-IAE, OTU-BIAE
	Traces	64-bytes Trail Trace Identifier (TTI) as defined in ITU-T G.709
ODU TCM Layer	Errors	TCMi-BIP-8, TCMi-BEI (i = 1 to 6)
	Alarms	TCMi-LTC, TCMi-TIM, TCMi-BDI, TCMi-IAE, TCMi-BIAE
	Traces	64-bytes Trail Trace Identifier (TTI) as defined in ITU-T G.709
ODU Layer	Errors	ODU-BIP-8, ODU-BEI
	Alarms	ODU-AIS, ODU-OCI, ODU-LCK, ODU-TIM, ODU-BDI, ODU-FSF, ODU-BSF, ODU-FSD, ODU-BSD
	Traces	Generates 64-bytes Trail Trace Identifier (TTI) as defined in ITU-T G.709
	FTFL ^b	As defined in ITU-T G.709
ODU0	Muxing	ODU0 into ODU1, ODU0 into ODU2
	Client types	Pattern, OC-3/STM-1, OC-12/STM-4, GigE using GFP-T
	GFP-T errors	SB Correctable, SB Uncorrectable, 10B_ERR
ODU Multiplexing^c	Alarms	OPU-MSIM, ODU-LOFLOM
ODUflex	Muxing	ODUflex into ODU2
	Client types	Ethernet using GFP-F or pattern for constant bit rate (CBR)
	Alarm	OPU-PLM, OPU-CSF, OPU-AIS
OPU Layer	Payload type (PT) label	Generates and displays received PT value
	GMP errors	Cm CRC-8, CnD CRC-5
	Errors	FEC-Correctable (Codeword), FEC-Uncorrectable (Codeword), FEC-Correctable (Symbol), FEC-Correctable (Bit), and FEC-Stress (Codeword)
Ethernet over OTN (EoOTN)^c	Mapping	Direct mapping into OTU1e or OTU2e; or using GFP-F into OTU2; or using GFP-T into ODU0; or using GFP-F into ODUflex
	BERT	Framed layer 2 supported with or without VLAN
	Pattern	PRBS 2E9-1, PRBS 2E11-1, PRBS 2E15-1, PRBS 2E20-1, PRBS 2E23-1, PRBS 2E31-1 and up to 10 user patterns. Capability to invert patterns
	Error insertion	FCS, 64B/66B block (10 GigE), symbol (GigE), bit
	Error measurement	Jabber/giant, runt, undersize, oversize, FCS, 64B/66B block (10 GigE), symbol (GigE), idle (GigE), false carrier (GigE)
	Error measurement (BERT)	Bit error, bit mismatch 0, bit mismatch 1
	Alarm insertion	Link down, local fault, remote fault, pattern loss
	Alarm detection	Link down, local fault, remote fault, pattern loss
	VLAN	Capability to generate one stream with one layer of VLAN
	Ethernet statistics	Multicast, broadcast, unicast, N-unicast, frame size distribution, bandwidth, utilization, frame rate

ADDITIONAL FUNCTION	
Service disruption time (SDT) measurements	The service disruption time test tool measures the time during which there is a disruption of service due to the network switching from the active channels to the backup channels. User-selectable triggers: all supported alarms and errors. Measurements: last disruption, shortest disruption, longest disruption, average disruption, total disruption, and service disruption count.
Round-trip delay (RTD) measurements	The round-trip delay test tool measures the time required for a bit to travel from the IQS-8130NGE transmitter back to its receiver after crossing a far-end loopback. Measurements are supported on all supported IQS-8130NGE interfaces and mappings. Measurements: last RTD time, minimum, maximum, average, measurement count (no. of successful RTD tests), failed measurement count.
Multichannel testing	Ability to monitor in real-time errors and alarms, and to perform simultaneous SDT measurements for all ODU0 channels; a user-defined threshold can also be applied to the SDT measurements for simple pass/fail results for each channel.

Notes

- a. Available with ODUMUX option.
- b. Fault type and fault location.
- c. Available on the IQS-8130NGE only.



ETHERNET INTERFACES

ELECTRICAL INTERFACES			
	10Base-T	100Base-T	1000Base-T
Tx bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Tx uncertainty (accuracy) (ppm)	±100	±100	±100
Rx bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Rx measurement accuracy (uncertainty) (ppm)	±4.6	±4.6	±4.6
Duplex mode	Half and full duplex	Half and full duplex	Full duplex
Jitter compliance	IEEE 802.3	IEEE 802.3	IEEE 802.3
Connector	RJ-45	RJ-45	RJ-45
Maximum reach (m)	100	100	100

100 Mbit/s AND GiGE OPTICAL INTERFACES					
	100Base-FX	100Base-LX	1000Base-SX	1000Base-LX	1000Base-ZX
Wavelength (nm)	1310	1310	850	1310	1550
Tx level (dBm)	-20 to -15	-15 to -8	-9 to -3	-9.5 to -3	0 to 5
Rx level sensitivity (dBm)	-31	-28	-20	-22	-22
Maximum reach	2 km	15 km	550 m	10 km	80 km
Transmission bit rate (Gbit/s)	0.125	0.125	1.25	1.25	1.25
Reception bit rate (Gbit/s)	0.125	0.125	1.25	1.25	1.25
Tx operational wavelength range (nm)	1280 to 1380	1261 to 1360	830 to 860	1270 to 1360	1540 to 1570
Measurement uncertainty (accuracy)					
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2
Maximum Rx before damage (dBm)	3	3	6	6	6
Jitter compliance	ANSI X3.166	IEEE 802.3	IEEE 802.3	IEEE 802.3	IEEE 802.3
Ethernet classification	ANSI X3.166	IEEE 802.3	IEEE 802.3	IEEE 802.3	IEEE 802.3
Laser type	LED	FP	VCSEL	FP	DFB
Eye safety	Class 1	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC	LC
Transceiver type	SFP	SFP	SFP	SFP	SFP

10 GiGE OPTICAL INTERFACES						
	10GBASE-SW	10GBASE-SR	10GBASE-LW	10GBASE-LR	10GBASE-EW	10GBASE-ER
Wavelength (nm)	850 Multimode	850 Multimode	1310 Singlemode	1310 Singlemode	1550 Singlemode	1550 Singlemode
Tx level (802.3ae-compliant) (dBm)	-7.3 to -1	-7.3 to -1	-8.2 to 0.5	-8.2 to 0.5	-4.7 to 4.0	-4.7 to 4.0
Rx operating range (dBm)	-9.9 to -1.0	-9.9 to -1.0	-14.4 to 0.5	-14.4 to 0.5	-15.8 to -1.0	-15.8 to -1.0
Transmission bit rate	9.95328 Gbit/s ± 4.6 ppm ^a	10.3125 Gbit/s ± 4.6 ppm ^a	9.95328 Gbit/s ± 4.6 ppm ^a	10.3125 Gbit/s ± 4.6 ppm ^a	9.95328 Gbit/s ± 4.6 ppm ^a	10.3125 Gbit/s ± 4.6 ppm ^a
Reception bit rate	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm
Tx operational wavelength range (802.3ae-compliant) (nm)	840 to 860	840 to 860	1260 to 1355	1260 to 1355	1530 to 1565	1530 to 1565
Measurement uncertainty (accuracy)						
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2	±2
Maximum Rx before damage (dBm)	0	0	1.5	1.5	4.0	4.0
Jitter compliance	IEEE 802.3ae					
Ethernet classification	IEEE 802.3ae					
Laser type	VCSEL	VCSEL	DFB	DFB	EML	EML
Eye safety	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1
Connector	Duplex LC					
Transceiver type (compliant with XFP MSA)	XFP	XFP	XFP	XFP	XFP	XFP

Note

a. When clocking is in internal mode.

ETHERNET FUNCTIONAL SPECIFICATIONS

TESTING (10 Mbit/s TO GIGE)	
EtherSAM (Y.1564)	Capability to perform the service configuration test, including the ramp and burst tests and service performance test as per ITU-T Y.1564. Tests can be performed to a loopback or dual test set mode for bidirectional results.
RFC 2544	Throughput, back-to-back, frame loss and latency measurements according to RFC 2544. Frame size: RFC-defined sizes, user-configurable.
BERT	Unframed, framed layer 1, framed layer 2 supported with or without VLAN Q-in-Q.
Patterns (BERT)	PRBS 2E9-1, PRBS 2E11-1, PRBS 2E15-1, PRBS 2E20-1, PRBS 2E23-1, PRBS 2E31-1, CRPAT, CSPAT, CJTPAT, Short CRTPAT, Long CRTPAT and up to 10 user patterns. Capability to invert patterns.
Error insertion (BERT)	FCS, bit and symbol.
Error measurement	Jabber/giant, runt, undersize, oversize, FCS, symbol, idle, carrier sense, alignment, collision, late collision, excessive collision, UDP and IP header checksum.
Error measurement (BERT)	Bit error, symbol error, idle error, bit mismatch 0, bit mismatch 1, performance monitoring (G.821 and G.826).
Alarm insertion (BERT)	LOS, pattern loss.
Alarm detection	LOS, link down, pattern loss, no traffic.
Service disruption time (SDT) measurement (BERT)	Defect or No Traffic mode. Disruption time statistics include shortest, longest, last, average, total and count.
VLAN stacking	Capability to generate one stream with up to three layers of VLAN (including IEEE 802.1ad Q-in-Q tagged VLAN).
Flow-control statistics	Pause time, last pause time, max. pause time, min. pause time, paused frames, abort frames, frames Tx, frames Rx.
Advanced autonegotiation	Capability to autonegotiate the rate, duplex and flow-control capabilities with another Ethernet port. Configurable autonegotiate parameters. Display of link partner capabilities. Fault injection: offline, link failure, autonegotiation error.
Multistream generation	Capability to transmit up to 10 streams. Configuration parameters are packet size, transmission mode (N-Frames, Burst, N-Burst, Ramp, N-Ramp and Continuous), MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TTL, UDP source/destination port and payload. (Available with Frame-Analyzer software option.) Selectable predefined stream profiles are also available for VoIP, video and data streams. VoIP codecs (G.711, G.723.1, G.729), video (MPEG-2 SDTV, MPEG-2 HDTV, MPEG-4 HDTV).
Traffic filtering	Capability to analyze the incoming traffic and provide statistics according to a set of up to 10 configurable filters. Filters can be configured for MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TCP source/destination port and UDP source/destination port. VLAN filtering can be applied to any of the stacked VLAN layers. (Available with Frame-Analyzer software option.)
Multistream analysis	Capability to analyze per stream statistics: packet jitter, latency, throughput, frame loss and out-of-sequence (available with Frame-Analyzer software option).
Ethernet statistics	Multicast, broadcast, unicast, N-unicast, pause frame, frame size distribution, bandwidth, utilization, frame rate, frame loss, out-of-sequence frames and in-sequence frames. (Available with Frame-Analyzer software option.)
Packet jitter statistics	Delay variation statistics (ms)—min., max., last, average and jitter measurement estimate (RFC 3393) (available with Frame Analyzer option).
PBB-TE ^a	Capability to generate and analyze streams with PBB-TE data traffic including configuration of B-MAC (source and destination), B-VLAN and I-tag (as per 802.1ah) and to filter received traffic by any of these fields.
MPLS ^a	Capability to generate and analyze streams with up to two layers of MPLS labels and to filter received traffic by MPLS label or COS.
IPv6 ^a	Capability to perform BERT, RFC 2544, traffic generation and analysis and Smart Loopback tests over IPv6; ping, traceroute, neighbor discovery and stateless auto-configuration.
Advanced filtering ^a	Capability to enhance the filters with up to four (4) fields each, which can be combined with AND/OR/NOT operations. A mask is also provided for each field value to allow for wildcards. Complete statistics are gathered for each defined filter.
Data capture ^a	Capability to perform 10/100/1000M full-line-rate data capture and decode. Capability to configure detailed capture filters and triggers as well as capture slicing parameters.
Traffic scan ^a	Capability to scan incoming live traffic and auto-discover all VLAN/VLAN Priority and MPLS ID/COS flows; capability to provide statistics for each flow including frame count and bandwidth.

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (10 Mbit/s TO GIGE)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency measurement	Supports clock frequency measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency).
Frequency offset measurement	Range: ± 120 ppm Resolution: 1 ppm Uncertainty (accuracy): ± 4.6 ppm
Dual test set	Performs end-to-end, bidirectional performance testing (as required by leading standards bodies)—remote IQS-8130NGE controlled via the LAN connection under test.
DHCP client	Capability to connect to a DHCP server to obtain its IP address and subnet mask for connecting on to the network.
Smart Loopback	Capability to return traffic to the local unit by swapping packet overhead up to layer 4 of the OSI stack.
IP tools	Capability to perform ping and traceroute functions.
TCP throughput measurements ^a	Capability to evaluate TCP throughput and provide performance results and statistics: window size with corresponding throughput, number of transmitted and retransmitted segments, round-trip time.

Note

a. Available as a software option.

ETHERNET FUNCTIONAL SPECIFICATIONS (CONT'D)

TESTING (10 GIGE)	
EtherSAM (Y.1564)	Capability to perform the service configuration test, including the ramp and burst tests and service performance test as per ITU-T Y.1564. Tests can be performed to a loopback or dual test set mode for bidirectional results.
RFC 2544	Throughput, back-to-back, frame loss and latency measurements according to RFC 2544. Frame size: RFC-defined sizes, user-configurable.
BERT	Unframed, framed layer 1, framed layer 2 supported with or without VLAN Q-in-Q.
Patterns (BERT)	PRBS 2E9-1, PRBS 2E11-1, PRBS 2E15-1, PRBS 2E20-1, PRBS 2E23-1, PRBS 2E31-1, and up to 10 user patterns.
Error insertion (BERT)	FCS, bit, 64B/66B Block
Error measurement	LAN/WAN: jabber/giant, runt, undersize, oversize, FCS, 64B/66B Block WAN: B1, B2, B3, REI-L, REI-P UDP, TCP and IP header checksum
Error measurement (BERT)	Bit error, bit mismatch 0, bit mismatch 1, performance monitoring (G.821 and G.826)
Alarm insertion	LOS, link down, local fault, remote fault, pattern loss (BERT) WAN: SEF, LOF, AIS-L, RDI-L, AIS-P, RDI-P, LCD-P, LOP-P, ERDI-PSD, ERDI-PCD, ERDI-PPD, UNEQ-P
Alarm detection	LOS, link down, local fault, remote fault, frequency offset, pattern loss (BERT) WAN: SEF, LOF, AIS-L, RDI-L, AIS-P, RDI-P, LCD-P, LOP-P, ERDI-PSD, ERDI-PCD, ERDI-PPD, PLM-P, UNEQ-P, link (WIS)
Service disruption time (SDT) measurement (BERT)	Defect or No Traffic mode. Disruption time statistics include shortest, longest, last, average, total and count.
VLAN stacking	Capability to generate one stream with up to three layers of VLAN (including IEEE802.1ad Q-in-Q tagged VLAN).
Flow-control statistics	Pause time, last pause time, max. pause time, min. pause time, paused frames, abort frames, frames Tx, frames Rx.
Multistream generation	Capability to transmit up to 10 streams. Configuration parameters are packet size, transmission mode (N-Frames, Burst, N-Burst, Ramp, N-Ramp and Continuous), MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TTL, UDP source/destination port and payload. (Available with Frame-Analyzer software option.) Selectable predefined stream profiles are also available for VoIP, video and data streams. VoIP codecs (G.711, G.723.1, G.729), video (MPEG-2 SDTV, MPEG-2 HDTV, MPEG-4 HDTV).
Traffic filtering	Capability to analyze the incoming traffic and provide statistics according to a set of up to 10 configurable filters. Filters can be configured for MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TCP source/destination port and UDP source/destination port. VLAN filtering can be applied to any of the stacked VLAN layers. (Available with Frame-Analyzer software option.)
Multistream analysis	Capability to analyze per stream statistics: packet jitter, latency, throughput, frame loss and out-of-sequence (available with Frame-Analyzer software option)
Ethernet statistics	Multicast, broadcast, unicast, N-unicast, pause frame, frame size distribution, bandwidth, utilization, frame rate, frame loss, out-of-sequence frames and in-sequence frames. (Available with Frame-Analyzer software option.)
Packet jitter statistics	Delay variation statistics (ms)—min., max., last, average and jitter measurement estimate (RFC 3393) (available with Frame-Analyzer option).
PBB-TE ^a	Capability to generate and analyze streams with PBB-TE data traffic including configuration of B-MAC (source and destination), B-VLAN and I-tag (as per 802.1ah) and to filter received traffic by any of these fields.
MPLS ^a	Capability to generate and analyze streams with up to two layers of MPLS labels and to filter received traffic by MPLS label or COS.
IPv6 ^a	Capability to perform BERT, RFC 2544, traffic generation and analysis and Smart Loopback tests over IPv6; ping, traceroute, neighbor discovery and stateless auto-configuration.
Advanced filtering ^a	Capability to enhance the filters with up to four (4) fields each, which can be combined with AND/OR/NOT operations. A mask is also provided for each field value to allow for wildcards. Complete statistics are gathered for each defined filter.
Data capture ^a	Capability to perform 10/100/1000M full-line-rate data capture and decode. Capability to configure detailed capture filters and triggers as well as capture slicing parameters.
Traffic scan ^a	Capability to scan incoming live traffic and auto-discover all VLAN/VLAN Priority and MPLS ID/COS flows; capability to provide statistics for each flow including frame count and bandwidth.
One-way delay	Capability to measure one-way frame delay as part of EtherSAM (Y.1564) and RFC 2544

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (10 GIGE)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency generation and measurement	Supports clock frequency generation and measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency). Frequency offset generation: Range: ± 50 ppm Resolution: ± 1 ppm Uncertainty (accuracy): ± 4.6 ppm Frequency offset measurement: Range: ± 135 ppm Resolution: ± 1 ppm Uncertainty (accuracy): ± 4.6 ppm
Signal label control and monitoring	Ability to configure and monitor J0 Trace, J1 Trace and payload signal label C2 (WAN).
Dual test set	Performs end-to-end, bidirectional performance testing (as required by leading standards bodies)—remote IQS-8130NGE controlled via the LAN connection under test.
DHCP client	Capability to connect to a DHCP server to obtain its IP address and subnet mask to connect to the network.
Smart Loopback	Capability to return traffic to the local unit by swapping packet overhead up to layer 4 of the OSI stack.
IP tools	Capability to perform ping and traceroute functions.

Note

a. Available as a software option.

ETHERNET FUNCTIONAL SPECIFICATIONS (CONT'D)

ADDITIONAL FEATURES	
Expert mode	Ability to set thresholds in RFC 2544 and BERT mode to provide a pass/fail status.
Scripting	Wide range of SCPI commands powerful enough to provide repeatable testing of complex configuration, yet simple enough to create a 10 gigabit BERT in as little as seven commands. The IQS-8130NGE also includes an intuitive macro recorder enabling users to easily record test actions and automatically create test scripts in VB.Net.
Event logger	Supports logging of test results, and the ability to print, export (to a file), or export the information contained in the logging tool.
Power up and restore	In the event of a power failure to the unit, the active test configuration and results are saved and restored upon bootup.
Save and load configuration	Ability to store and load test configurations to/from non-volatile memory.
Configurable test views	Allows users to customize their test views; i.e., to dynamically insert or remove test tabs/windows, in addition to creating new test windows, so as to accurately match their testing needs.
Configurable test timer	Allows a user to set a specific start, stop and duration for tests.
Test favorites	Capability to select and load from predefined or user-modified test conditions.
Report generation	Ability to generate test reports in the following user-selectable formats: .pdf, .html, .txt and .csv.
Graph	Allows to graphically display the test statistics of the performance (RFC 2544).
Screen capturing	Capability to gather a snap-shot of the screen for future use.
Logger printing	Capability to send logger messages to a supported local printer.
Remote control	Remote control through Visual Guardian Lite software.

FIBRE CHANNEL INTERFACES

FC-1X/2X/4X				
Wavelength (nm)	850	1310	1310	1550
Tx level (dBm)	-9 to -2.5	-8.4 to -3	0 to 5	1 to 5
Rx level sensitivity (dBm)	-15 at FC-4 -18 at FC-2 -20 at FC-1	-18 at FC-4 -21 at FC-2 -22 at FC-1	-18 at FC-4 -21 at FC-2 -22 at FC-1	-16.5 at FC-4 -20.5 at FC-2 -22 at FC-1
Maximum reach	500 m on 50/125 µm MMF ^a 300 m on 62.5/125 µm MMF ^a	4 km	30 km	40 km
Transmission bit rate (Gbit/s)	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25
Reception bit rate (Gbit/s)	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25
Tx operational wavelength range (nm)	830 to 860	1260 to 1350	1285 to 1345	1544.5 to 1557.5
Measurement accuracy (uncertainty)				
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2
Max Rx before damage (dBm)	3	3	3	3
Jitter compliance	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2
FC classification	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2
Laser type	VCSEL	Fabry-Perot	DFB	DFB
Eye safety	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC
Transceiver type	SFP	SFP	SFP	SFP

FC-10X					
Wavelength (nm)	850	1310	1310	1550	1550
Tx level (dBm)	-5 to -1	0.5 max	-6 to -1	-1 to 2	0 to 4
Rx level sensitivity (dBm)	-11.1	-12.6	-14.4	-16	-23
Maximum reach	300 m on 50/125 µm MMF 30 m on 62.5/125 µm MMF	10 km	10 km	40 km	80 km
Transmission bit rate (Gbit/s)	10.5	10.5	10.5	10.5	10.5
Reception bit rate (Gbit/s)	10.5	10.5	10.5	10.5	10.5
Tx operational wavelength range (nm)	840 to 860	1260 to 1355	1290 to 1330	1530 to 1565	1530 to 1565
Measurement accuracy (uncertainty)					
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2
Max Rx before damage (dBm)	6	6	6	2	4
Jitter compliance	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3
FC classification	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3
Laser type	VCSEL	DFB	DFB	EML	EML
Eye safety	Class 1	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC	LC
Transceiver type	XFP	XFP	XFP	XFP	XFP

Note

- a. Values in the table correspond to FC-1 rate. For FC-2, maximum reach is 300 m on 50/125 µm MMF and 150 m on 62.5/125 µm MMF. For FC-4, maximum reach is 150 m on 50/125 µm MMF and 70 m on 62.5/125 µm MMF.

FIBRE CHANNEL FUNCTIONAL SPECIFICATIONS

TESTING (1X, 2X, 4X AND 10X)	
BERT	Unframed, framed FC-1, framed, FC-2
Patterns (BERT)	PRBS 2E31-1, 2E23-1, 2E20-1, 2E15-1, 2E11-1, 2E9-1 CSPAT, CRPAT, CJTPAT, and 10 user-defined 32 bits patterns
Error insertion	Bit error, symbol error, oversize error, CRC error, undersize error and block error
Error measurement	Bit error, symbol error, oversize error, CRC error, undersize error and block error
Alarm insertion	LOS, pattern loss
Alarm detection	LOS, pattern loss
Buffer-to-buffer credit testing	Buffer-to-buffer credit estimation based on latency
Latency	Round-trip latency measurement

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (1X, 2X, 4X AND 10X)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency measurement	Supports clock frequency measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency).
Frequency offset measurement	Range: ± 120 ppm Resolution: 1 ppm Uncertainty (accuracy): ± 4.6 ppm

ADDITIONAL SPECIFICATIONS

IQS-8130NGE ^a
Next-generation SONET/SDH 10 Gbit/s and OTN 10.7 Gbit/s
Supports up to 10/10.7 Gbit/s optical rates, as well as electrical DSn/PDH interfaces
Test Interfaces
OTN: OTU1 (2.7 Gbit/s), OTU2 (10.7 Gbit/s) OTU1e (11.0491 Gbit/s), OTU2e (11.0957 Gbit/s) OTU1f (11.2701 Gbit/s), OTU2f (11.3176 Gbit/s)
SONET: STS-1e, STS-3e, OC-3, OC-12, OC-48, OC-192
SDH: STM-0e, STM-1e, STM-0, STM-4, STM-16, STM-64
DSn: DS1, DS3, Dual DS1 Rx, Dual DS3 Rx
PDH: E1, E2, E3, E4
Ethernet: 10/100/1000M electrical, 100/1000M optical and 10 GigE LAN/WAN
FC: 1x, 2x, 4x, 10x

GENERAL SPECIFICATIONS	
	IQS-8130NGE
Weight (without transceiver)	0.9 kg (2.0 lb)
Size (H x W x D)	125 mm x 74 mm x 282 mm (4 15/16 in x 2 15/16 in x 11 1/8 in)
Temperature	
Operating	0 °C to 40 °C (32 °F to 104 °F)
Storage	-40 °C to 60 °C (-40 °F to 140 °F)

Note

- a. Modules can also be purchased as IQS-8130NGE-FLEX, which provides maximum configuration flexibility, allowing all rates and options shown in "Ordering Information" to be ordered individually.

ORDERING INFORMATION

IQS-81XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

Model ■

See models listed in previous page

SONET/SDH Rate Options ■

- 155 = 155 Mbit/s (OC-3/STM-1)
- 622 = 622 Mbit/s (OC-12/STM-4)
- 2.5G = 2.5 Gbit/s (OC-48/STM-16)
- 10G = 10G Gbit/s (OC-192/STM-64) ^a

OTN Rate Options ■

- OTU1 = OTN optical rate 2.7 Gbit/s
- OTU2 = OTN optical rate 10.7 Gbit/s ^a
- OTU2-1e-2e = OTN optical rates 11.0491/ 11.0957 Gbit/s ^a
- OTU2-1f-2f = OTN optical rates 11.2701 Gbit/s and 11.3176 Gbit/s ^a

Ethernet Rate Options ■

- LAN/WAN 10GigE = 10 GigE LAN/WAN ^b
- 10M/100M/1000M = 10/100/1000Base and GigE optical
- 100M-O-AP = 100M optical

Fibre Channel Rate Options ■

- FC1X = 1X Fibre Channel interface
- FC2X = 2X Fibre Channel interface
- FC4X = 4X Fibre Channel interface
- FC10X = 10X Fibre Channel interface ^a

SONET/SDH Options ■

- SONET = SONET-BASE-SW
- SDH = SDH-BASE-SW
- SONET-SDH = Software option for combined SONET/SDH functionality
- G.747 = E1/2M in DS3/45M analysis, as per ITU-T G.747 recommendation
- DS1-FDL = DS1 facility data-link generation/analysis
- DS3-FEAC = DS3 far-end alarms and loopback code words
- DUAL RX = Dual receiver testing mode for DS1 and DS3 interfaces
- TCM = Tandem connection monitoring
- INTR-THRU-MODE = SONET/SDH intrusive Through mode
- SMARTMODE = Real-time signal discovery and alarm/error monitoring per channel
- MULTI-CH-SDT = Multichannel SDT measurements

OTN Options ■

- ODUMUX = ODU MUX functionality ^{a,c}
- ODU0 = ODU0 mapping ^d
- ODUflex = ODUflex functionality ^e
- OTN-INTR-THRU = OTN intrusive Through mode ^d
- EoOTN = Ethernet-over-OTN functionality ^f
- OTU2-GFP-F = 10GigE LAN mapping into ODU2 using GFP-F
- MULTI-CH-SDT = Multichannel SDT measurements

Next-Generation Options ■

- HO-VCAT = High-order virtual concatenation
- LO-VCAT = Low-order virtual concatenation
- LCAS = Link capacity adjustment scheme ^g
- GFP-F = Generic framing procedure-framed
- EoS = Ethernet-over-SONET/SDH ^h

Ethernet Options ■

- 100optical = 100 Mbit/s optical Ethernet
- Frame-Analyzer = Multiple stream generation and analysis
- PBB-TE = PBB-TE testing
- MPLS = MPLS testing
- Adv_filtering = Advanced filtering capabilities
- IPv6 = IPv6 testing capabilities
- TCP-THPUT = TCP throughput testing
- EtherSAM = EtherSAM (ITU-T Y.1564) testing
- TRAFFIC-SCAN = VLAN/MPLS traffic scan

Example: IQS-8130NGE-SONET-SDH-155-622-2.5G-OTU1-HO-VCAT-8190-8590

Transceivers XFP Test Port ^a

- 00 = Without XFP telecom
- IQS-81900 = Multirate (10-11.3 Gbit/s) optical XFP transceiver module with LC connector; 1310 nm; 10 km reach
- IQS-81901 = Multirate (10/10.7 Gbit/s) optical XFP transceiver module with LC connector; 1550 nm; 40 km reach
- IQS-81902 = Multirate (10/10.7 Gbit/s) optical XFP transceiver module with LC connector; 1550 nm; 80 km reach
- IQS-85900 = 10GBase-SR/-SW (850 nm, LAN/WAN PHY) LC connectors; optical XFP transceiver module
- IQS-85901 = 10GBase-LR/-LW (1310 nm, LAN/WAN PHY) LC connectors; optical XFP transceiver module
- IQS-85902 = 10GBase-ER/-EW (1550 nm, LAN/WAN PHY) LC connectors; optical XFP transceiver module

Transceivers SFP Ethernet Add/Drop Port ^{a, i}

- 00 = Without Ethernet add/drop
- IQS-8190 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1310 nm; 15 km reach
- IQS-8191 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1310 nm; 40 km reach
- IQS-8192 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1550 nm; 80 km reach
- IQS-8193 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1550 nm; 40 km reach
- IQS-8590 = GigE/FC/2FC optical SFP transceiver module with LC connector; 850 nm; MMF, <500 m reach
- IQS-8591 = GigE/FC/2FC optical SFP transceiver module with LC connector; 1310 nm; 10 km reach
- IQS-8592 = GigE/FC/2FC optical SFP transceiver module with LC connector; 1550 nm; 90 km reach

Transceivers SFP Test Port ^a

- 00 = SFP test port
- IQS-8190 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1310 nm; 15 km reach
- IQS-8191 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1310 nm; 40 km reach
- IQS-8192 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1550 nm; 80 km reach
- IQS-8193 = Multirate (155/622 Mbit/s, 2.5/2.7 Gbit/s, GigE/FC/2FC) optical SFP transceiver module with LC connector; 1550 nm; 40 km reach
- IQS-85910ⁱ = 100Base-FX (1310 nm) MM, LC connectors; optical SFP transceiver module for IQS-8510B Packet Blazer
- IQS-85911ⁱ = 100Base-LX (1310 nm) SM, LC connectors; optical SFP transceiver module for IQS-8510B Packet Blazer
- IQS-85912ⁱ = SFP modules GigE/FC/2FC/4FC at 850 nm, MMF, <500 m
- IQS-85913ⁱ = SFP modules GigE/FC/2FC/4FC at 1310 nm, SMF, <4 km
- IQS-85914ⁱ = SFP modules GigE/FC/2FC/4FC at 1310 nm, SMF, <30 km
- IQS-85915ⁱ = SFP modules GigE/FC/2FC/4FC at 1550 nm, SMF, <40 km

NOTES

- a. Applies only to IQS-8130NGE, except the IQS-8130NGE-2.5G.
- b. Applies only to IQS-8130NGE and IQS-8130NGE-2.5G.
- c. Must be combined with the OTU1 and OTU2 options.
- d. Must be combined with the OTU1 or OTU2 option.
- e. Applicable for IQS-8130NGE modules only (except the IQS-8130NGE-2.5G) and must be combined with the OTU2 option.
- f. Must be combined with the OTU2-1e-2e or OTU2-GFP-F or ODU0 option.
- g. Must be combined with the HO-VCAT or LO-VCAT option.
- h. Must be combined with the GFP-F option.
- i. Available with 4x Fibre Channel interface only.
- j. Multiple options can be purchased to suit the required test application.

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.

