

FLS-170

VISUAL FAULT LOCATOR (VFL)

- Pocket-sized VFL—essential tool for any technician testing fiber



KEY FEATURES

1 mW output power

7 km range

Laser safety class 2

Bright red laser at 650 nm

Flashing and continuous operation modes

30 hours of operation (typical)

Standard AA alkaline batteries

Pocket-sized pen-style design

2.5 mm universal connector

1.25 mm adapter available

The FLS-170 is the easiest way to identify fibers from end to end, and to locate polished connector endfaces. Its red laser shines through most jacketed fibers to help you pinpoint breaks, bends, faulty connectors, splices and other causes of signal loss. It has a reach of up to 7 km^a. The VFL pinpoints faults visually by creating a bright red glow at the exact location of the fault on singlemode or multimode fibers. It can also be used to identify the port of a fiber in a patch panel.

COMPACT DESIGN

With a pocket-sized and streamlined pen-style design, this VFL can easily be carried anywhere. It comes with an anodized aluminium casing. This long-lasting and lightweight device is designed to be part of the essential toolkit for any fiber-testing field technician.

COST-EFFECTIVE


The high efficiency of this device guarantees prolonged operation with two standard AA alkaline batteries, typically providing 30 hours of uninterrupted operation. It is also compatible with rechargeable batteries, reducing the need for single-use ones.

This VFL offers an affordable solution for locating fibers and faults, making it a valuable—if not essential—tool for each and every fiber technician.

a. Typical length of continuous fiber at which end-to-end identification is possible, depending on fiber attenuation and on ambient light conditions at test site.

SPECIFICATIONS ^a	
Operation mode	Flashing and continuous
Flashing frequency (Hz)	2 ~ 3
Wavelength (nm) (typical)	650
Emitter type	Laser
Power output (mW) (max.)	1
Distance range (km) (typical) ^b	7

FIVE WAYS TO USE A VFL

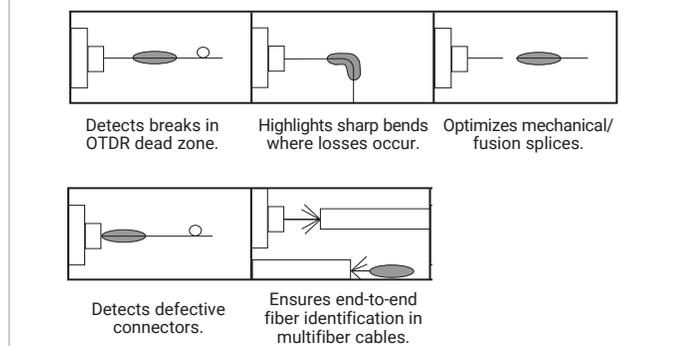

a. Specifications are valid at 23 °C ± 1 °C.

b. Depends on fiber attenuation and ambient light conditions.

c. Typical battery life using AA alkaline batteries.

ORDERING INFORMATION

FLS-170

GENERAL SPECIFICATIONS	
Power supply	2 AA alkaline batteries
Laser class	2
Battery life (h) ^c	Pulsed > 27 Continuous > 15
Length	180 mm (7 1/16 in)
Maximum diameter	24 mm (15/16 in)
Weight (with batteries)	180g (6.3 oz)
Temperature	Operating -10 °C to 40 °C (14 °F to 104 °F) Storage -40 °C to 70 °C (-40 °F to 158 °F)

LASER SAFETY



STANDARD ACCESSORIES (INCLUDED)

Quick reference guide, belt-loop holster and two AA alkaline batteries.

ACCESSORIES



EXFO headquarters T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

For the most recent patent marking information, please visit www.EXFO.com/patent. EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.